





## General Arrangement

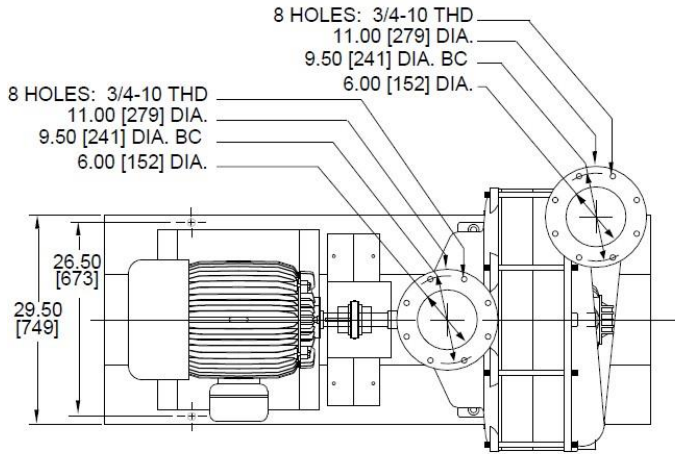







6" INLET 6" OUTLET

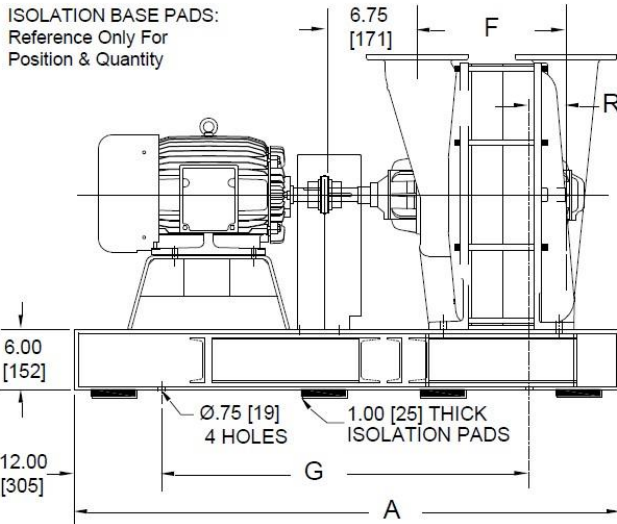

## Flange Orientation

INLET END VIEW

OUTLET END VIEW



## Dimensional Data - inches [millimeters]

FRAME	A	F	G	R
4201	48.75 [1238]	9.25 [235]	24.75 [629]	4.50 [114]
4202	60.75 [1543]	12.69 [322]	36.75 [933]	2.00 [51]
4203	60.75 [1543]	16.13 [410]	36.75 [933]	4.50 [114]
4204	72.75 [1848]	19.56 [497]	48.75 [1238]	2.00 [51]
4205	72.75 [1848]	23.00 [584]	48.75 [1238]	2.00 [51]
4206	72.75 [1848]	26.44 [672]	48.75 [1238]	4.50 [114]
4207	84.75 [2153]	29.88 [759]	60.75 [1543]	2.00 [51]
4208	84.75 [2153]	33.31 [846]	60.75 [1543]	2.00 [51]

## Weight - lb [kg] & Inertia - lb-ft<sup>2</sup> [kg-m<sup>2</sup>]

FRAME	PKG. LESS MOTOR	BARE UNIT	WK2
4201	749 [340]	590 [268]	9 [0.38]
4202	925 [420]	760 [345]	18 [0.76]
4203	1103 [500]	930 [422]	27 [1.14]
4204	1294 [587]	1100 [499]	36 [1.53]
4205	1494 [678]	1300 [590]	46 [1.91]
4206	1666 [756]	1470 [667]	55 [2.29]
4207	1836 [833]	1640 [744]	64 [2.67]
4208	2035 [923]	1810 [821]	73 [3.06]

## Product Notes

1. Information is approximate, subject to change without notice, and not for construction use unless certified
2. Position #1 is standard inlet & outlet orientation
3. A and G dimensions may vary depending on motor frame size
4. Performances noted are typical and not job specific
5. Consult authorized sales representative for job specific blower or exhauster performance sizing
6. Factory ASME PTC-10 test offered for performance verification

