




## Series 4000 Static Dissipative Hose

The Series 4000 Static Dissipative Hose features a seven-strand copper ground wire embedded in a specially formulated clear static dissipative thermoplastic polyurethane alloy and is reinforced with a rigid black external ABS helix. The static dissipative thermoplastic polyurethane alloy uses an inherently dissipative polymer (IDP) system to provide clean, permanent ESD protection. Highly flexible and abrasion-resistant, this hose has a smooth interior and is available in a variety of inside diameters and lengths to provide you with a custom fit for your application.

- PVC Swivel Cuffs – Static Conductive
- 1-1/2" or 2" I.D. – Length up to 50'
- Negative vacuum to -29" Hg
- Temperature range -40°F to 200°F.
- Polyurethane construction
- Manufactured with FDA acceptable materials
- Wall Thickness = .040"
- Smooth interior assures minimal friction loss, efficient air flow & elimination of material build-up

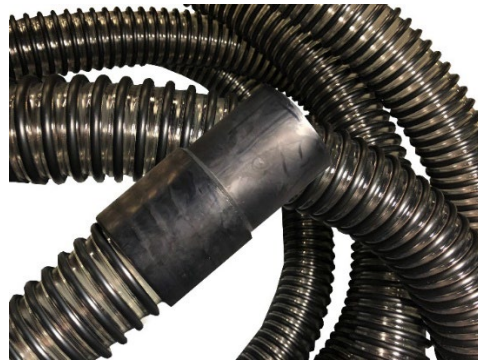

Part Number	Diameter	Description
15-HO-4025	1-1/2"	1-1/2" x 25' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
15-HO-4050	1-1/2"	1-1/2" x 50' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
20-HO-4025	2"	2" x 25' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
20-HO-4050	2"	2" x 50' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
25-HO-4025	2-1/2"	2-1/2" x 25' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
25-HO-4050	2-1/2"	2-1/2" x 50' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
30-HO-4025	3"	3" x 25' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs
30-HO-4050	3"	3" x 50' Ft. static dissipative polyurethane hose with rigid ABS helix and embedded copper wire. 0.040 wall with non-swivel conductive cuffs