



DUST REAPER


**THE INVINCIBLE
II**



**1001 2ND AVE
DAYTON, KY 41074**

**[513] 337-9745
WWW.LEGENDSEQUIPMENT.COM**

- AUTOMATIC CLEANING -

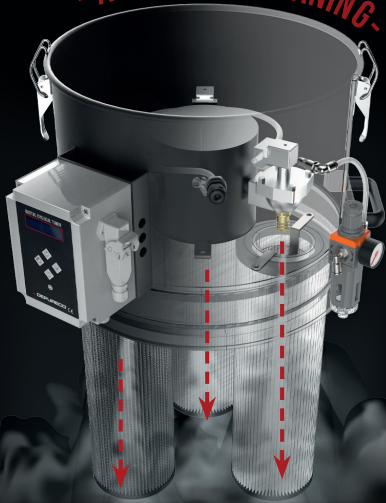

4.8 to 11.5 HP

POWER

13.950 in²

FILTER

26 gal Bin

CAPACITY

SP

Each filter cartridge is cleaned at adjustable intervals by a high-pressure (6 bar) air jet, which shakes the cartridge, dislodging large amounts of material from the filter, making it completely clean in a matter of seconds.

It requires compressed air to operate.



**OPTIONAL
COMPRESSOR
ON BOARD**


**POWERFUL
SIDE CHANNEL BLOWER**
480V/60 Hz

**X3
cartridges**




13.950 in²

**OPTIONAL
TANGENTIAL
INLET**



**INLET WITH
DEFLECTOR**



26 gal

**DETACHABLE BIN
ON WHEELS**


SPEC SHEET

	Units	DR4000-48	DR4000-65	DR4000-65TX	DR4000-85	DR4000-85TX	DR4000-115
Motors Type		Side channel blower	Side channel blower	Side channel blower	Side channel blower	Side channel blower	Side channel blower
Power	HP	4.8	6.5	6.5	8.5	8.5	11.5
Voltage Frequency	V/Hz	480/60	480/60	480/60	480/60	480/60	480/60
Maximum vacuum	inH2O	119	100	125	100	177	145
Maximum air flow	CFM	247	300	210	400	210	400
Inlet	Ø in	2.75	2.75	2.75	2.75	2.75	2.75
Noise level - (EN ISO 3744)	dB(A)	74	76	76	76	76	79
Bin capacity	gal	26	26	26	26	26	26
Dimensions	in	25.59 X 43.31	25.59 X 43.31	25.59 X 43.31	25.59 X 43.31	25.59 X 43.31	25.59 X 43.31
Height	in	55.12	55.12	55.12	55.12	55.12	55.12
Weight	lb	287	309	309	345	345	419
Primary filter							
Type		Star filter	Star filter	Star filter	Star filter	Star filter	Star filter
Surface area Diameter	in ² in	5900	5900	5900	5900	5900	5900
(Class EN 60335-2-69)		M Class	M Class	M Class	M Class	M Class	M Class
Media		Polyester	Polyester	Polyester	Polyester	Polyester	Polyester
Filter cleaning		Manual Shaker	Manual Shaker	Manual Shaker	Manual Shaker	Manual Shaker	Manual Shaker

OPTIONAL FILTERS



BFL
M class filter



ANT M
Antistatic filter



MTF
Teflon filter



NOMEX
482° F Resistant filter



PTFE
PTFE filter

OPTIONAL



GRD
Grounding



TAN
Tangential inlet + cyclone




BX
AISI 304 stainless steel bin



FLT
Floating device for liquids

ACCESSORIES



Works with VacTrac System



Wet & Dry Kit
Ø 2 in



Starter Kit
Ø 2 in



Carbon Fiber Overhead Tools

15-F-AC-7181
20-F-AC-7181